

DX200 series order Guide for Chiller, CDU

Universal Intelligent Controller

DX Series

Choice of Controller

Stepless 1 Comp



DX200-11

Step 1 Comp



DX270-11

Stepless 1~2 Comp



DX220-11

Stepless 1~4 Comp




DX240-11

Choice of Temperature Sensor


DPR-TH1-P6D100L

Sensor type : NTC 5KΩ
 Range : -50 ~ 105°C
 Accuracy : ±0.3°C at 25°C
 Sheath : Φ6 X 100mm, SUS
 Cable : 2C X 0.5mm, sus-mesh shield tefron
 Protection : IP67

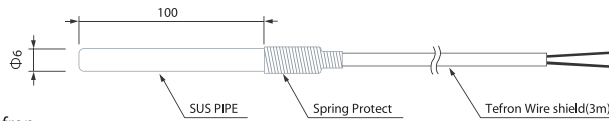


DPR-TH1-S6D100L

Sensor type : NTC 5KΩ
 Range : -50 ~ 105°C
 Accuracy : ±0.3°C at 25°C
 Sheath : Φ6 X 100mm, SUS
 Cable : 2C X 0.5mm, sus-mesh shield tefron
 Protection : IP67

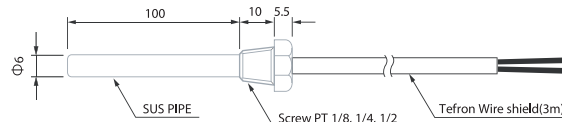

DPR-TH1-H6D100L


Sensor type : NTC 5KΩ
 Range : -50 ~ 105°C
 Accuracy : ±0.3°C at 25°C
 Sheath : Φ6 X 100mm, SUS
 Protection : IP67

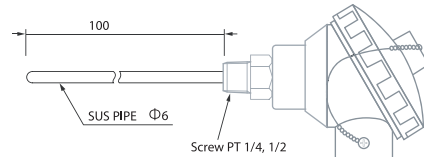

Discharge Temperature Sensor

DPR-TH2-P6D100L

Sensor type : NTC 10KΩ
 Range : -50 ~ 250°C
 Accuracy : ±1.5°C at 25°C
 Sheath : Φ6 X 100mm, SUS
 Cable : 2C X 0.5mm, sus-mesh shield tefron
 Protection : IP67

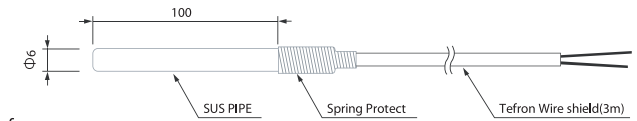

Choice of Pressure Sensor

DP506.930A

-1 ~ 9 bar, 4~20mA, 20UNF



DP506.933A

0 ~ 30 bar, 4~20mA, 20UNF

